

CENTRAL PNEUMATIC®

AUTO-REWIND AIR HOSE REEL

MODEL 95211

ASSEMBLY AND OPERATING INSTRUCTIONS



Due to continuing improvement, actual product may differ slightly from the product described herein.



3491 Mission Oaks Blvd. Camarillo, CA 93011
Visit our Web site at <http://www.harborfreight.com>

Copyright© 2006 by Harbor Freight Tools®. All rights reserved. No portion of this manual or any artwork contained herein may be reproduced in any shape or form without the express written consent of Harbor Freight Tools.

For Technical questions and replacement parts, please call 1-800-444-3353

SPECIFICATIONS

Overall Dimensions:	7" L X 11-3/4" W X 11-3/4" H
Hose Reel Stopper DIA.	2-3/8" DIA. X 1-3/8" H
Inside Reel Dimensions:	10-1/8" DIA. X 3-3/4" W
Mounting:	Wall or Ceiling Mount
Hose Diameter:	3/8" Diameter
Mounting Hole Diameter:	1/2" DIA. (QTY2)
Hose Length:	20 ft. Length
Mounting Bracket Dim:	4-1/2" L X 1-3/16" W X 11-13/16" H
Fitting Type/Head:	1/4" Male Inlet - 18 TPI
Hose Color:	Yellow
Maximum Hose Pressure:	300 PSI

SAVE THIS MANUAL

You will need this manual for the safety warnings and precautions, assembly, operating, inspection, maintenance and cleaning procedures, parts and assembly diagram. Keep your invoice with this manual. Write the invoice number on the inside of the front cover. Write the products serial number in the back of the manual near the assembly diagram, or write the month and year of purchase if the product has no serial number. Keep this manual and invoice in a safe and dry place for future reference.

SAFETY WARNINGS AND PRECAUTIONS

Warning: When using this tool, basic safety precautions should always be followed to reduce the risk of personal injury and/or damage to the equipment.

READ ALL INSTRUCTIONS BEFORE USING THIS PRODUCT.

1. **Keep work area clean:** Cluttered work areas invite injuries. This is a high pressure Air Hose and can blow dust, or lightweight articles off workbenches and/or other nearby surfaces.
2. **Keep children away:** Children can be a distraction. This tool, if used incorrectly can cause injury. Children should never be allowed to play or loiter around work area.
3. **Unplug idle equipment:** When not in use, this tool should be unplugged from air pressure source.
4. **Dress properly:** Do not wear loose clothing or jewelry as they can get caught in moving parts, (such as when the reel is retracting the air hose). Protective long sleeve shirt, long pants and hard leather shoes are recommended.
5. **Use eye and ear protection:** Always wear ANSI-approved impact safety goggles and ear protection.

6. **Maintain tools:** Inspect the Mounting Bracket to make sure it has not worked its way loose. The Auto-Rewind Air Hose Reel could possibly fall and be damaged. Inspect the Air Hose often and, if damaged, have it replaced or repaired by an authorized repair facility.
7. **Do not use this tool if under the influence of Drugs or Alcohol:** Read warning labels on prescriptions to determine if your judgment or reflexes might be impaired while taking them. If there is any doubt, do not use this tool.
8. **Stay Alert:** Watch what you are doing. This air tool could inject air into and under your skin. It is important that the operator NOT use it to blow anything off skin, or hands. Wear heavy-duty gloves when using this tool.

SPECIFIC SAFETY WARNINGS

1. Do not disassemble this Auto-Rewind Air Hose Reel. It includes a large, high tension spring and could cause injury. It is NOT meant to be taken apart.
2. When mounting, (mounting hardware not included), the Bracket that holds the Auto-Rewind Air Hose Reel, use extreme caution to prevent drilling into electrical wires and/or cables.
3. When attaching Mounting Bracket (34), to the Auto-Rewind Air Hose Reel, be careful not to over tighten the Bracket Attach Bolts (30).
4. Do not let go of the hose during use. While operating, keep bystanders and children away.

WARNING: The warnings, cautions, and instructions discussed in this instruction manual cannot cover all possible conditions and situations that may occur. It must be understood by the operator that common sense and caution are factors that cannot be built into this product but must be supplied by the operator.

UNPACKING

When unpacking, check to make sure all parts listed on page 4 of this manual are included. If any parts are missing or broken, please call Harbor Freight Tools® as soon as possible.

INSTALLING THE MOUNTING BRACKET

Place the Mounting Bracket on the wall, or stud where you want to install it. Use a number 2 pencil (not included) to mark the holes for drilling. Drill two holes, being careful not to drill into wires and/or cables. Be sure to know the location of all electrical wiring in the immediate area.

(The Mounting bracket hardware is not included with this tool.)


BASIC OPERATIONS

1. Attach air supply to the Air Inlet Connector (6), attached to the Leader Hose (5), extending from the side of the Auto-Rewind Air Hose Reel.
2. Attach the gun or tool you will be using to the Air Hose Tool Connector (6A), tip.
3. Make sure you are wearing ANSI-approved goggles before starting your air compressor and be sure to grip the tool firmly in case air is escaping. This prevents the tool from flopping around, possibly causing damage, or personal injury.
4. Never let go of the hose during use.

PARTS LIST

No.	Description	Qty	No.	Description	Qty
1	Screw ST4 x 20	20	18	E - Clamp	2
2	Side Covers	2	19	"O" - Ring Ø14 x Ø2	2
3	Right Angle Connector	1	20	Pin	1
4	Collar	3	21	Axle	1
5	Leader Hose	1	23	Locking Wedge Pin	1
6	Air Inlet Connector	1	24	Spring	2
8	Right Cover Panel	1	25	Drum	1
9	Pressure Air Hose	1	26	High Tension Main Spring	1
10	Hose Reel Stopper	1	27	Spring Cover	1
11	Screw M4 x 20	2	28	Screw M10 x 25	4
12	Hose Collar Clips	2	29	Left Cover Panel	1
13	Inlet Air Base Nut	1	30	Screw M10 x 25	2
14	Air Hose Connector	1	31	Bolt Washer Ø13.5 x Ø21 x 4	2
15	Air Inlet Base	1	33	Bracket Attach Nut M10	2
16	Inlet Base Cover	1	34	Mounting Bracket	1

DIAGRAM

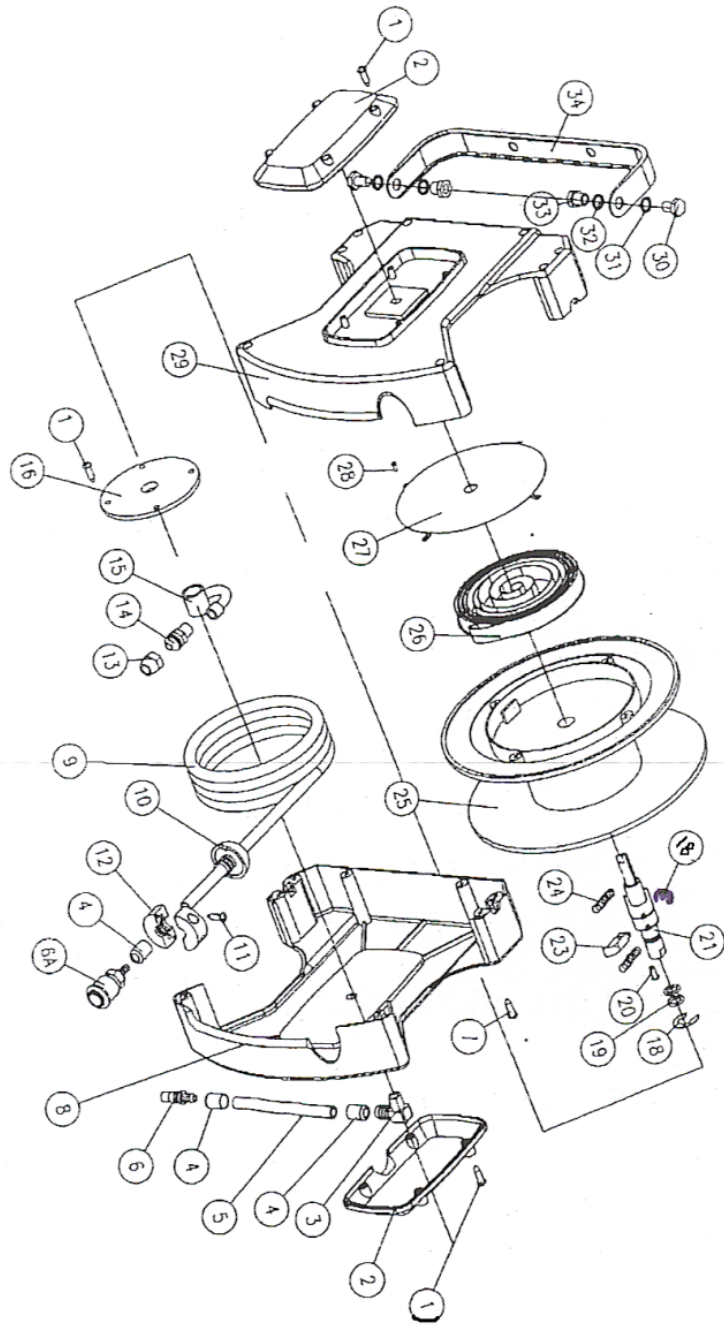

Note: Some parts are listed and shown for illustration purposes only and are not available individually as replacements parts.

SKU 95211


For technical questions, please call 1-800-444-3353.

Page 5

PLEASE READ THE FOLLOWING CAREFULLY

THE MANUFACTURER AND/OR DISTRIBUTOR HAS PROVIDED THE PARTS DIAGRAM IN THIS MANUAL AS A REFERENCE TOOL ONLY. NEITHER THE MANUFACTURER NOR DISTRIBUTOR MAKES ANY REPRESENTATION OR WARRANTY OF ANY KIND TO THE BUYER THAT HE OR SHE IS QUALIFIED TO MAKE ANY REPAIRS TO THE PRODUCT OR THAT HE OR SHE IS QUALIFIED TO REPLACE ANY PARTS OF THE PRODUCT. IN FACT, THE MANUFACTURER AND/OR DISTRIBUTOR EXPRESSLY STATES THAT ALL REPAIRS AND PARTS REPLACEMENTS SHOULD BE UNDERTAKEN BY CERTIFIED AND LICENSED TECHNICIANS AND NOT BY THE BUYER. THE BUYER ASSUMES ALL RISK AND LIABILITY ARISING OUT OF HIS OR HER REPAIRS TO THE ORIGINAL PRODUCT OR REPLACEMENT PARTS THERETO, OR ARISING OUT OF HIS OR HER INSTALLATION OF REPLACEMENT PARTS THERETO.

WARRANTY



**LIMITED 90 DAY
WARRANTY**

Harbor Freight Tools Co. makes every effort to assure that its products meet high quality and durability standards, and warrants to the original purchaser that this product is free from defects in materials and workmanship for the period of ninety days from the date of purchase. This warranty does not apply to damage due directly or indirectly to misuse, abuse, negligence or accidents; repairs or alterations outside our facilities; or to lack of maintenance. We shall in no event be liable for death, injuries to persons or property, or for incidental, contingent, special or consequential damages arising from the use of our product. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation of exclusion may not apply to you. THIS WARRANTY IS EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS.

To take advantage of this warranty, the product or part must be returned to us with transportation charges prepaid. Proof of purchase date and an explanation of the complaint must accompany the merchandise. If our inspection verifies the defect, we will either repair or replace the product at our election or we may elect to refund the purchase price if we cannot readily and quickly provide you with a replacement. We will return repaired products at our expense, but if we determine there is no defect, or that the defect resulted from causes not within the scope of our warranty, then you must bear the cost of returning the product.

This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

3491 Mission Oaks Blvd. • PO Box 6009 • Camarillo, CA 93011 • (800) 444-3353